


CP- VNC-V21FR3-VMD

2 MP WDR VF Array Vandal Dome Camera - 30Mtr.

INDIGO

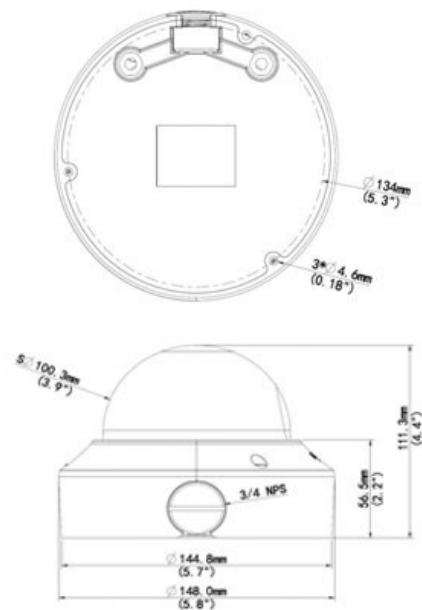

Main Features

- 1/2.9" 2MP PS CMOS Image Sensor
- Max 25/30fps@1080P
- H.265, H.264, MJPEG Triple-stream encoding
- WDR(120dB), Day/Night (ICR), Corridor mode, 3D-DNR, ROI, AWB, AGC, BLC
- 2.8~12mm Varifocal Lens
- IR Range of 30 Mtrs, Micro SD, IP67, IK10, PoE
- Supports Instastream technology, save disk space and bandwidth upto 70%
- Mobile Software: Android, iOS
- CMS Software: IVMS



Instastream

CE FC RoHS COMPLIANT

CP- VNC-V21FR3-VMD

2 MP WDR VF Array Vandal Dome Camera - 30Mtr.



Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control(AGC)
Video Compression
S/N Ratio
Video Streaming
Resolution
Video Output
Frame Rate
Privacy Mask
ICR
ROI
Audio Input
Audio Compression
Audio Output
Alarm IN
Alarm Out
WDR
Protocol
Smart Detection
Ethernet
OSD
IR
Micro SD
Audio
Operating Temperature
Humidity

Specification

1/2.9" 2MP Progressive scan CMOS
Colour: 0.03 Lux (F1.4, AGC ON) 0 Lux with IR
Auto/Manual, 1/6~1/100000 s
Auto/Manual
2.8~12mm Varifocal Lens
Auto/Manual
H.265/ H.264/ MJPEG
>52dB
Triple
1920 × 1080
1 BNC, impedance 75Ω; amplitude 1 V [p-p]
1080P (1920×1080): Max. 30 fps; 720P (1280×720): Max. 30 fps; D1 (720×576): Max. 8 fps
Up to 8 areas
IR-cut filter with auto switch (ICR)
Supports
impedance 35 kΩ; amplitude 2 V [p-p]
G.711
impedance 600 Ω; amplitude 2 V [p-p]
1 IN
1 Out
Optical WDR (Upto 120dB)
IPv4,IGMP,ICMP,ARP,TCP,UDP,L2TP, DHCP, PPPoE, RTP,RTSP,NTP,FTP,HTTP, SIP, ONVIF, API
Intrusion, crossing line, Motion detection, Audio detection, Face detection, Defocus, Scene Change, People counting
1 RJ45 10M/100M Base-TX Ethernet
Up to 8 OSDs
IR Range of 30 Mtr., Smart IR
Up to 128 GB
Two-way audio Supported
-40°C ~ +60°C (-40°F ~ 140°F)
≤ 90% RH (non-condensing)



CP- VNC-V21FR3-VMD

2 MP WDR VF Array Vandal Dome Camera - 30Mtr.



Feature

Power Source

Power Consumption

Weatherproof Standard

Dimension

Weight

Specification

12 V DC, or PoE (IEEE802.3 af)

max.8.5 W

IP67 & IK10

Φ148 x 111.3 mm (Ø5.8" x 4.4")

0.75 kg