


CP- VNC-T21R3M

2 MP Full HD IR Bullet Camera - 30Mtr.

INDIGO

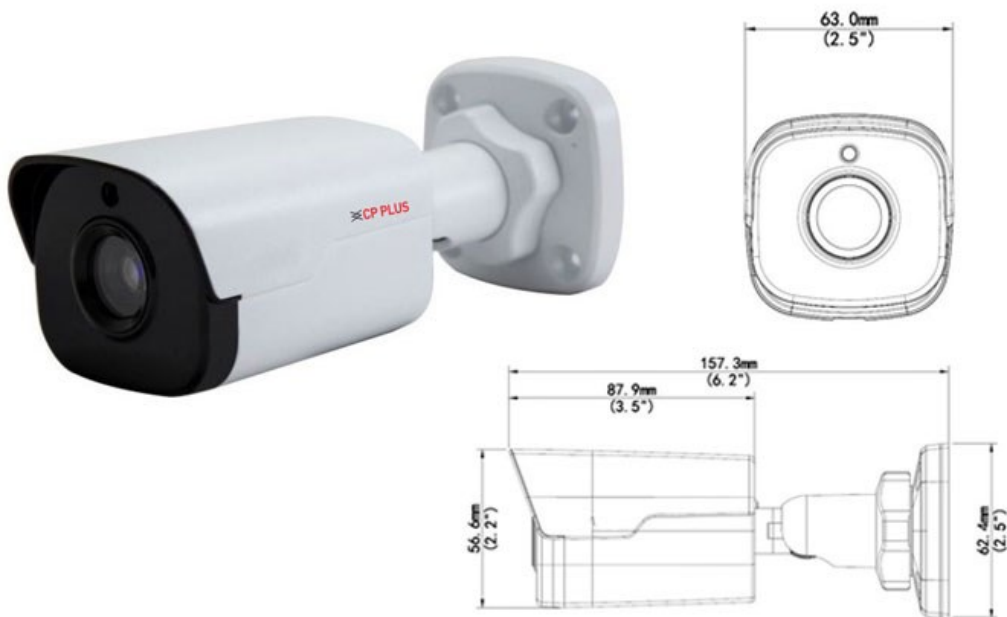

Main Features

- 1/2.7" 2MP PS CMOS Image Sensor
- 1080P: Max. 30 fps , 720P: Max. 30 fps , D1: Max. 25 fps
- H.265, H.264, MJPEG Triple-stream Encoding
- DWDR, Day/Night (ICR), Corridor mode, 2D/3D-DNR, ROI, AWB, AGC, BLC
- 4mm lens (6mm Optional)
- IR Range of 30 Mtrs, Smart IR, IP66, PoE
- Supports Instastream technology, save disk space and bandwidth upto 70%
- Mobile Software: Android, iOS
- CMS Software: IVMS



Instastream

CE FC RoHS COMPLIANT

CP- VNC-T21R3M

2 MP Full HD IR Bullet Camera - 30Mtr.



Feature

Image Sensor
Minimum Illumination
Shutter Speed
White Balance
Lens
Gain Control(AGC)
S/N Ratio
Video Compression
Video Streaming
Resolution
Frame Rate
Motion detection
Privacy Mask
ICR
ROI
WDR
Protocol
Smart Detection
Ethernet
IR
OSD
Operating Temperature
Humidity
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

1/2.7" 2MP Progressive scan CMOS
Colour: 0.02 Lux (F1.8, AGC ON) 0 Lux with IR on
Auto/Manual, 1/6~1/8000 s
Auto/Manual
4mm Lens (6mm Optional)
Auto/Manual
>52dB
H.265, H.264, MJPEG
Triple
1920x1080
1080P (1920 x 1080): Max. 30 fps , 720P (1280 x 720): Max. 30 fps , D1 (720 x 576): Max. 25 fps
Up to 2 areas
Up to 8 areas
IR-cut filter with auto switch (ICR)
Supports
Digital
L2TP, IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, ONVIF, API
Intrusion, crossing line, Motion detection, Audio detection, Face detection, Defocus, Scene Change, People counting
1 RJ45 10M/100M Base-TX Ethernet
IR Range of 30 Mtr., Smart IR
Up to 8 OSDs
-35°C ~ +60°C (-31°F ~ 140°F)
≤ 95% RH (non-condensing)
12 V DC, or PoE (IEEE802.3 af)
Max 6.4 W
IP66
157.3 × 62.4 × 63 mm (6.2" × 2.5" × 2.5")
0.45 kg

