


CP- VNC-T21ZR20-VMD

2MP WDR Network Array Bullet Camera - 200Mtr.

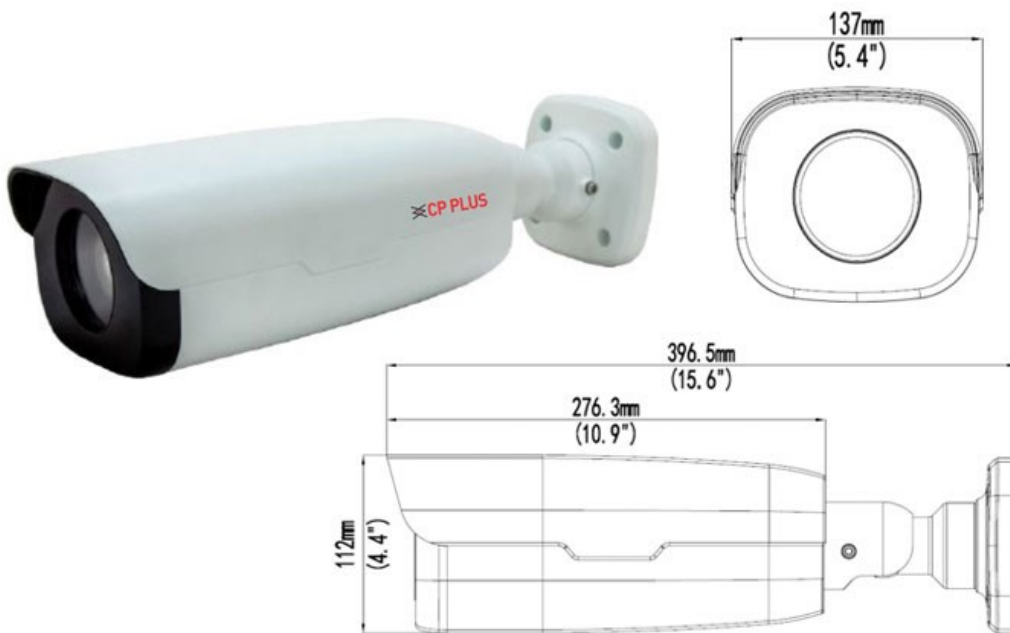

Main Features

- 1/1.9" 2MP PS CMOS Image Sensor
- Max 60fps@1080P
- H.265, H.264, MJPEG Triple-stream encoding
- WDR(120dB), Day/Night (ICR), Corridor mode, ROI, AWB, AGC, BLC, HLC
- 6.5 ~ 143 mm Motorized Lens
- IR Range of 200 Mtrs, Micro SD, IP67
- Supports Instastream technology, save disk space and bandwidth upto 70%
- Mobile Software: Android, iOS
- CMS Software: IVMS



InstaStream



CP- VNC-T21ZR20-VMD

2MP WDR Network Array Bullet Camera - 200Mtr.



Feature

Image Sensor
 Minimum Illumination
 Shutter Speed
 White Balance
 Lens
 Gain Control (AGC)
 Video Compression
 S/N Ratio
 Video Streaming
 Resolution
 Video Output
 Frame Rate
 Motion detection
 Privacy Mask
 ICR
 ROI
 Audio Input
 Audio Compression
 Audio Output
 Alarm IN
 Alarm Out
 WDR
 Protocol
 Smart Detection
 Ethernet
 IR
 OSD
 Interface Ports
 Micro SD
 Audio

Specification

1/1.9" 2MP Progressive scan CMOS
 Colour: 0.002 Lux (F1.5, AGC ON) 0 Lux with IR
 Auto/Manual, 1/6~1/100000 s
 Auto/Manual
 6.5 ~ 143 mm Motorized Lens
 Auto/Manual
 H.265, H.264, MJPEG
 >52dB
 Triple
 1920 x 1080
 1 BNC, impedance 75Ω; amplitude 1 V [p-p]
 1080P (1920×1080): Max.60 fps , 720P (1280×720): Max.30 fps , D1 (720×576): Max.15 fps
 Up to 4 areas
 Up to 8 areas
 IR-cut filter with auto switch (ICR)
 Supports
 impedance 35 kΩ; amplitude 2 V [p-p]
 G.711
 impedance 600Ω; amplitude 2 V [p-p]
 2 Ch. IN
 1 Ch. Out
 WDR (120dB)
 IPv4, IGMP, ICMP, ARP, TCP, UDP, L2TP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SIP, 802.1x, ONVIF, API
 Intrusion, crossing line, Motion detection, Audio detection, Face detection, Defocus, Scene Change, People counting
 100M Base-FX SFP + 100M Base-TX Ethernet
 IR Range of 200 Mtr.
 Up to 8 OSDs
 1 RS485 (support Pelco-D/P)
 Micro SD, Up to 128 GB
 Two-way audio Supported



CP- VNC-T21ZR20-VMD

2MP WDR Network Array Bullet Camera - 200Mtr.



Feature

Auto Iris
Operating Temperature
Humidity
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

Auto/Manual, F1.5~F3.4, DC-Iris
-40°C ~ +60°C (-40°F ~ 140°F)
≤ 95% RH (non-condensing)
24 V AC ±25%
6~19.5W
IP67
396.5mm x 137mm x 112mm (15.6" x 5.4" x 4.4")
3.7 kg