


CP- VNC-V21ZR3-VMD

2 MP Full HD WDR Array Vandal Dome Camera - 30 Mtr.

INDIGO

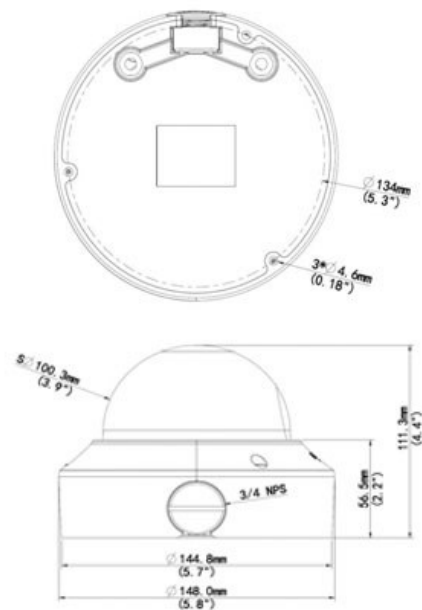

Main Features

- 1/2.9" 2MP PS CMOS Image Sensor
- Max 25/30fps@1080P
- H.265, H.264, MJPEG Triple-stream encoding
- WDR(120dB), Day/Night (ICR), Corridor mode, 3D-DNR, ROI, AWB, AGC, BLC
- 2.8~12mm Motorized Lens
- IR Range of 30 Mtrs, Smart IR, Micro SD, IP66, IK10, PoE
- Supports Instastream technology, save disk space and bandwidth upto 70%
- Mobile Software: Android, iOS
- CMS Software: IVMS



Instastream

CE FCC RoHS COMPLIANT

CP- VNC-V21ZR3-VMD

2 MP Full HD WDR Array Vandal Dome Camera - 30 Mtr.



Feature

Image Sensor
 Minimum Illumination
 Shutter Speed
 White Balance
 Lens
 Gain Control (AGC)
 Video Compression
 S/N Ratio
 Video Streaming
 Resolution
 Video Output
 Frame Rate
 Privacy Mask
 ICR
 ROI
 Audio Input
 Audio Compression
 Audio Output
 Alarm IN
 Alarm Out
 WDR
 Protocol
 Smart Detection
 Ethernet
 OSD
 IR
 Micro SD
 Audio
 Operating Temperature
 Humidity

Specification

1/2.9" 2MP Progressive scan CMOS
 Colour: 0.02 Lux (F1.6, AGC ON) 0 Lux with IR
 Auto/Manual, 1/6~1/100000 s
 Auto/Manual
 2.8~12mm Motorized Lens
 Auto/Manual
 H.265, H.264, MJPEG
 >52dB
 Triple
 1920 x 1080
 1 BNC, impedance 75Ω; amplitude 1 V [p-p]
 1080P (1920 x 1080) @30 fps, 1080P (1920 x 1080) @25fps
 Supports
 IR-cut filter with auto switch (ICR)
 Supports
 impedance 35 kΩ; amplitude 2 V [p-p]
 G.711
 impedance 600 Ω; amplitude 2 V [p-p]
 1 channel
 1 channel
 Optical WDR (Upto 120dB)
 IPv4,IPv6, IGMP, ICMP, ARP, TCP, UDP, DHCP, L2TP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS,SNMP, SMTP, SIP, 802.1x, ONVIF , API
 Intrusion, crossing line, Motion detection, Audio detection, Face detection, People counting
 1 RJ45 10M/100M Base-TX Ethernet
 Up to 8 OSDs
 IR Range of 30 Mtr. , Smart IR
 Up to 128 GB
 Two-way audio Supported
 -40°C ~ +60°C (-40°F ~ 140°F)
 ≤ 95% RH (non-condensing)



CP- VNC-V21ZR3-VMD

2 MP Full HD WDR Array Vandal Dome Camera - 30 Mtr.



Feature

Power Source

Power Consumption

Weatherproof Standard

Dimension

Weight

Specification

12 V DC, or PoE (IEEE802.3 af)

max.6.6 W (PoE :max.7.2 W)

IP66 & IK10

Φ148 x 111.3 mm (Ø5.8" x 4.4")

0.75 kg